



2622

DOCKET NO.: NOKIA-00018

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of : JYRKI HOISKO
U.S. Serial No. : 10/034,237
Filed : December 27, 2001
For : DISPLAYING AN IMAGE
Group No. : 2622
Examiner : (Not Yet Assigned)

PS
7C
8-17-04

Commissioner for Patents
Washington, D. C. 20231

RECEIVED
MAR 15 2002
Technology Center 2600

Sir:

CERTIFICATE OF MAILING BY FIRST CLASS MAIL

The undersigned hereby certify that the enclosed:

- 1) Certified copy of United Kingdom Application No. 0031752.9; and,
- 2) Postcard Receipt.

relating to the above application, were sent to the Commissioner for Patents via First Class Mail in an envelope addressed to Commissioner for Patents, Washington, D.C. 20231 on 2/28/02.

Date: 2/28/02

Kathy Longenecker
Mailer

Date: 28 Feb 02

Robert H. Kelly
Robert H. Kelly
Registration No., 33,922

P.O. Box 802432
Dallas, Texas 75380
Phone: (214) 922-9221
Fax: (214) 969-7557
E-mail: rkelly@novakov.com



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECEIVED

MAR 1 5 2002

Technology Center 2600

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Signed

Dated

02 JAN 2002

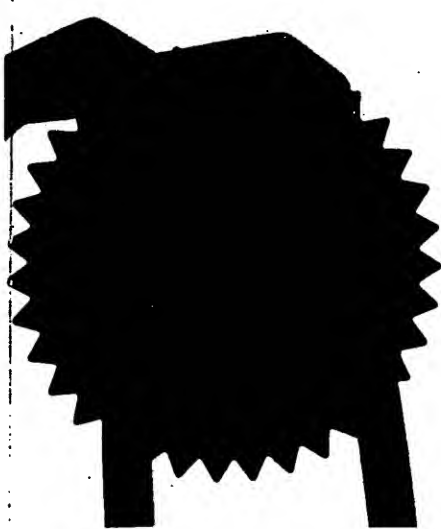

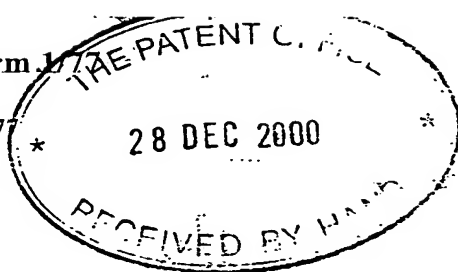

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

310EC00 E594610-3 002825
P01/7700 0.00-0031752.9

1. Your reference 200062/JPR/sjr

2. Patent application number
(The Patent Office will fill in this part) **0031752.9** **28 DEC 2000**

3. Full name, address and postcode of the or of each applicant (underline all surnames)
NOKIA MOBILE PHONES LTD
KEILALAH DENTIE 4
03260 ESPOO
FINLAND

Patents ADP number (if you know it) 7406747002

If the applicant is a corporate body, give the country/state of its incorporation Finland

4. Title of the invention
DISPLAYING AN IMAGE

5. Name of your agent (if you have one)
PAGE WHITE & FARRER
54 DOUGHTY STREET
LONDON WC1N 2LS
UNITED KINGDOM

Patents ADP number (if you know it) 1255003 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body
See note (d)) Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	22
Claim(s)	7
Abstract	1
Drawing(s)	3 +3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *Page White & Farrer* Date 28.12.00
PAGE WHITE & FARRER

12. Name and daytime telephone number of person to contact in the United Kingdom
Juha-Pekka Ruuskanen
020 7831-7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Displaying an image

Field of the Invention

5 The present invention relates to displaying an image, and in particular, but not exclusively, to displaying an image based on image data by means of a user equipment.

Background of the Invention

10

Different types of images are known. An image may comprise, for example, a photograph of a target. The image may present a target such as a scenery, an object, or one or more living subjects such as one or more persons or animals. An image may
15 also comprise a picture of a graphical or textual presentation and so on.

In addition to the conventional way of storing and presenting images on photographic paper or similar, image data can also
20 be stored as digitised data in an appropriate data storage means such as in a hard disc of a computer or in a CD (compact disc). The image can then presented to a viewer by displaying the image on a display of a user equipment based on the image data. Such a user equipment typically comprises display means
25 for displaying the image. Examples of possible user equipment for displaying images based on image data comprise various computers (both fixed and portable computers) and other user devices or equipment adapted to be able to display images based on image data.

30

The image data may be generated by the same user equipment by which it is displayed or by another equipment. The image data may be stored in memory means of the user equipment. The image

data may also be stored in a remote data storage. It is also possible to transport the image data from the remote storage to the user equipment by means of appropriate communication media, such as over a data communication network or by means of a data carrier. If the user equipment is not directly an element of the data network, a data communication media is required between the data network and the user equipment.

The transmission of data between the data network and the user equipment may be accomplished over a wireless interface. Arrangements utilising mobile user equipment and wireless interfaces for the transportation and presentation of images may be referred to by term 'mobile visual communication'. The mobile visual communication can be understood as a technology that enables a mobile user to send and receive images e.g. by using some proprietary method or via a multimedia messaging system (MMS) gateway.

A still image itself does not tell anything else than what was captured in the image when it was taken. Thus the image may not always be sufficiently informative to describe all desired information associated with the image. The image itself may not describe enough about e.g. the context of the target. When an image is transported to a recipient, it may also be desired to be able to mediate additional information associated with the image. For example, some users may wish to transmit additional information regarding the context of the image, such as the temperature at the location of the image, noises surrounding the target, importance of the image, excitement associated with the situation that is presented by the image and so on.

A prior art solution to present additional information has been addition of informative text within or aside the image area. Textual information may also have been contained in the name of the image or the textual information may have been transported as a separate text/description file. However, text information embedded in the picture may use a substantial area of the display screen or otherwise disturb the image. This is an disadvantage especially with the display screen of mobile user equipment, since the display screen thereof has typically a substantially small size. In addition, reading and understanding the text messages requires attention and thus the solutions based on textual messages typically require the user to perceive and process the text in his brain.

In addition, the recipient of the image may wish to view the image or e.g. an MMS message immediately after he/she becomes aware that the reception of image data has commenced. However, downloading of all image data that associates with the image may take a while, especially if the transportation occurs over one or more wireless interfaces.

Summary of the Invention

Embodiments of the present invention aim to address one or several of the above problems.

According to one aspect of the present invention, there is provided a method for displaying an image comprising: receiving image data associated with the image at a user equipment from a data communication system; generating a visual effect to be presented in association with a version of the image, said visual effect being generated based on additional information associated with the image; displaying

said visual effect by display means of the user equipment; and displaying the image by the display means.

According to one aspect of the present invention, there is
5 provided a method in a mobile station for displaying an image
on a display means thereof, comprising: receiving image data
associated with the image and additional information from a
data communication system, said image data and additional
information being transmitted over a wireless interface
10 between the mobile station and the data communication system;
generating a visual effect to be presented in association with
a version of the image, said visual effect being generated
based on said additional information; displaying said visual
effect by the display means; and displaying the image by the
15 display means.

According to one aspect of the present invention, there is
provided a user equipment for displaying an image comprising:
receiver means for receiving image data associated with the
20 image from a data communication system; display means for
displaying the image based on the received image data; and
processor means for generating a visual effect based on
additional information associated with the image and for
controlling display of the visual effect, wherein the user
25 equipment is arranged to display a version of the image
comprising said visual effect.

According to another aspect of the present invention there is
provided a communication system, comprising: a data
30 communication media for transporting data between at least two
user equipment; a first user equipment for generating image
data associated with an image, said first user equipment being
adapted to associate additional information with the image

data; a second user equipment comprising a receiver means for receiving the image data, a processor means for processing said received image data, and a display means for displaying the image based on the received image data, said second user
5 equipment being also adapted to display an altered version of the image, wherein the altered version comprises a visual effect generated based on said additional information associated with the image.

10 The embodiments of the invention may provide a possibility to present additional information to the viewer of the image in a visualised form. The visualised information may be presented prior to displaying the original i.e. complete image to the viewer. The additional information about the imaging target
15 may provide the viewer with a better understanding of the image and/or conditions affecting the target of the image, and thus enhance the visual communication. Some of the embodiments enable provision of additional information even before the complete image has been downloaded into the user equipment.
20 Thus the viewer may not need to wait to receive all image data before he/she can already start experiencing information associated with the image.

Brief Description of Drawings

25

For better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

Figure 1 shows a communication system capable of
30 employing embodiments of the present invention;

Figures 2A and 2B, 3A and 3B, 4A to 4D and 5 illustrate exemplifying embodiments of the invention; and

Figure 6 is a flowchart illustrating the operation of one embodiment of the present invention.

Description of Preferred Embodiments of the Invention

5

Figure 1 shows user equipment and a communication network that may be used for the embodiments of the present invention. More particularly, Figure 1 shows a first user equipment 1 and a second user equipment 2 and a communication network 5. The users of the devices 1 and 2 are not shown in Figure 1 for clarity reasons. The user equipment 1 and 2 are adapted for communication with each other over the data network 5. The communication between the respective user equipment 1,2 and the communication network 5 occurs via a respective wireless interface 3,4. The communication network 5 may be any appropriate network capable of transporting image data.

The first user equipment 1 is provided with imaging means 10, such as a digital camera means. The imaging means 10 are adapted to enable the user of the device 1 to point a lens of the imaging means 10 towards a target 6 of an image and for generating digitised image data of the object 6. The user equipment 1 may be provided with a display 11 for viewing the image e.g. during the "shooting" thereof and/or before transmission of the image data to the second user equipment 2 via the data network 5. Control instructions may be input to the device 1 by means of the control buttons 12.

The second user equipment 2 is provided with a display 21 enabling the user thereof to view an image that has been generated based on image data. The image data may be received from the network 5 via the wireless interface 4. Image data may be stored in an image data storage 24 of the device 2. The

operation of the display and/or presentation of any images on the display is controlled by processor means 23. A display software may be adapted to be run in the processor 23 of the user device 2 so that the processor is capable of expressing the additional information on the display 21. Control instructions may be input to the device 2 by means of the control buttons 22.

At the present a system that is based on a multimedia messaging system (MMS) is believed to provide an appropriate pathway for sending and receiving multimedia content, such as still-images, between the user equipment 1 and 2. However, it shall be appreciated that the mobile imaging devices 1 and 2 may also use other data transportation media such as GSM data connection for the exchange of binary information, such as images without departing the scope of the present invention.

Figure 1 shows also an external database 7. This may be used in some embodiments for storing image data such that the image data may be retrieved from the database upon request from the user device 1 or 2.

In the embodiments of the present invention visual effects, such as different colouring or image quality schemes or graphical elements may be presented to the user with a modified version of the image while the "real" i.e. original version of the image is presented without these visual effects. The effect of the embodiments is based on the fact that half of the primate human cortex is devoted to handling of visual information. Thus the humans are substantially good in analysing any visual information shown to them. Visualised information can typically be understood more effortlessly than other types of information. The visual information can also be

understood substantially quickly, such as within half a second or so.

Thus visualisation of additional information may help the
5 viewer to more easily to understand the image and possible
background information associated with the image. The
following will disclose in more detail different possibilities
for dynamic visualisation of additional information to the
viewers. Some possible uses of such dynamic visualisation are
10 also discussed.

The additional information to be presented to the viewer of
the image may be defined at the time of creation of the image.
A possibility for this is to use the imaging apparatus to
15 insert instructions regarding the presentation of the image to
the image data, as will be explained in more detail later. The
additional information is then visualised in the displaying
stage at the receiving terminal, i.e. while the recipient is
watching the image. The visualisation process comprises
20 modifying the image between two or more different versions
thereof.

There are several possibilities how to employ additional
visual effects on the image to give additional information to
25 the viewer of the image. For example, the image may first
appear as coloured with a certain colour and intensity, and
then quickly turn back to normal. The additional information
regarding the context of the image that may be visualised by
such a colour change may associate e.g. to temperature or the
30 age of an image.

Other possibilities for visualisation include, without
limiting to these, visualisation of a spatial geographic

difference between the two user equipment 1, 2 or a location of the transmitting station 1. This may occur e.g. by zooming the image from different areas or edges of the display area 21. Visualisation schemes may also be used to separate
 5 different geographic locations or regions that associate with the image or the source (e.g. caller groups or individual callers) of the image. The visualisation may also be used for expressing additional information that associates with emotional feelings or priority information (e.g. low, medium,
 10 high). Auditory information about the context of the picture may also be visualised. As a further example, it is also possible to visualise any movements of the user of the sending device 1 or the target 6. Examples of the implementations of these possibilities are described in more detail below with
 15 reference to Figures 2 to 5.

The user of the transmitting or source device 1 may determine what additional information should be presented to the user of the receiving device 2. The additional information may be
 20 inserted manually by the sender of the image. According to a possibility the additional information is added automatically e.g. by sensors in the camera means or similar means capturing the image.

25 According to an embodiment the additional information can be embedded by the user device 2 within the name of the image file. For example, the name of the image data file could be:

scenery_Temp_Hot.jpg; or
 30 Friend_laughing_MoodHappy.jpg.

The processor 23 of the device 2 is adapted to recognise any image file names containing this type of indications. After recognition the image can be presented accordingly.

5 At the receiving and displaying device 2 the additional information is visualised e.g. by altering the colours of the image. This can be done e.g. by simply altering the colour index table of the device 2. In the indexing the colour values are interpreted e.g. by means of an appropriate hardware
10 and/or software and the colours of the image will be changed accordingly. The altering may be controlled by the processor 23. This approach is advantageous in that no modification to the bitmap image itself is necessarily needed. In an indexed colour scheme, only the index colour needs be modified. That
15 is, if the image is a 256 colour image, only 256 values must be modified. However, this approach requires that colour indexing is used for the images to be displayed.

Examples of possible formats that use colour indexing schemes
20 include PNG (Portable Network Graphics) and GIF (CompuGraphics Image Format) or similar formats. Colour displays that have no true colours (e.g. 16/24bit displays) also typically use colour indexing. Some of the true colour systems use indexing to quickly and easily accomplish colour
25 balancing or calibration of the image.

Alternatively, if no colour indexing is used, the system may be adapted to modify the whole bitmap. In this approach two different images are generated, one comprising the visual
30 effect and the other the actual image. In this approach the original image may need to be copied and modified several times to an image buffer of the device 2. Thus this approach

may require more processing capacity from the processor 23 than the ones based on indexing.

It also possible to apply the modification on a portion of the image only. For example, only the middle area of the image window can be altered to form the visual effect. This may be accomplished by defining an area of the imaging area which is to be altered in the image data. The creator of the image may use this feature e.g. to highlight the importance of a certain area or object of the image.

The additional information may also be included with the image data as a separate text file. Such a file may be based e.g. on a ASCII, HTML (Hyper Text Markup Language), XML (Extended Markup Language), RDF (Resource Description Framework), a JPEG or JPEG 2000 techniques or any other file that includes a free form field for additional information. For example, in HTML/XML/RDF type formats the content of the additional text file may look like the following example for a description file of the received image:

```

    <name>Greetings from Greece!</name>
    <id>#23423423e342</id>
    <source>John Smith</source>
    <position>N32o23'32"E45o32'23"</position>
    <direction>130o</direction>
    <time>23-May-2000 12:03:12</time>
    <temperature>299K</temperature>
    <importance>high</importance>
    <category>vacation photo</category>
    <keywords>Greece, John, people, flowers, sun, blue
    sky</keywords>

```

`<related to pictures>#234234e4323, #234234e43243,
#23423werw234, ..</related to pictures>`

This information may alternatively be embedded within the
5 image structure or within the image binary content, thus
providing more space for the required descriptions. The
implementation of systems that use this approach depend on the
format that is used for the image.

10 The flowchart of Figure 6 illustrates a possible operation of
the invention. In a preferred mode of operation the visual
effects are presented to the viewer and thus the additional
information is visually presented to the viewer prior the
actual image is displayed for the viewer. For example, a
15 different version of the image is presented first for a
certain period of time after the picture has first appeared on
a display device prior displaying the complete or final
version of the image. The required time period depends on the
application. The time period is preferably defined such that
20 it is long enough for the viewers to see the visual effect and
to understand the additional information based on the effect
but also such that the users do not experience the visual
effect as disturbing.

25 In addition to providing visualised additional information,
this embodiment may also provide another advantage that
relates to the capability of the receiving device to instantly
display an image. That is, a first version of the image may be
displayed before all data that associates with the image has
30 been received. The first version does not necessarily need to
be as sharp and/or "correct" as the final version. Therefore
all image data may not be required before it is possible to
display the first version of the image to the viewer. This may

be an advantage especially when the image is received over a wireless interface, as the downloading of substantially large image files over the wireless interface may take a while. The embodiment provides a possibility to display additional
5 information to the viewer during the downloading of the image data.

The following will discuss by way of examples possible ways of utilising the invention.

10

In the first example a user 1 shoots by means of his user equipment 1 an image of a snowy scenery. The image is digitised by means of the processor 13 of the user equipment 1 for the transmission over the data network 5. The user may
15 then transmit the image data to a user device 2 e.g. by means of the MMS.

The image data is received at the mobile user device 2. The processor means 23 recognises that the image data transmission
20 contains text, audio and/or context information that associates with the image. The mobile user device 2 displays the image dynamically. More particularly, at a first step the image is shown with blue and white colours only. However, after a certain period of time, such as 0.5 to 1 seconds or
25 so, the image is presented in normal colours. The user of the device 2 may visually identify the differences between the initial colours and the actual colours. The change in colours will assist the user to understand that it is cold at the imaging target. Vice versa, e.g. for a photograph taken in hot
30 conditions, the first image may be e.g. coloured with orange or red after which the image is changed back to normal.

The above described embodiment is illustrated by Figures 2A and 2B. Figure 2A shows the first version of an image, said first version being coloured (the colouring being illustrated by the grid of lines) to indicate a hot temperature. Figure 2B
5 illustrates the normal version of the image that is shown after the Figure 2A version has been displayed for a certain period of time.

In another example a user browses images taken by his imaging
10 device and/or images otherwise provided to the user device. It shall be appreciated that in addition to methods in which the images are stored in the user device 20, the images may be stored in a remote picture archive such as in the database 7 of Figure 1. The remote image storage 7 may be offered by an
15 appropriate service provider. The database 7 may also comprise e.g. a home PC of a user (not shown). The PC is accessible by the mobile station of the user.

The images may be stored for long periods of time. During
20 image browsing and prior presentation thereof to the user, the images may be dynamically modified depending on the age of the image. The visualisation may associate with the age of the image relative to the moment when the image is viewed. The age effect may also indicate the relative difference in age
25 between the image and another image (e.g. a previously viewed image). The visual effect may also indicate the relative age of an image when compared to a set of images.

The visualisation of the age of the image may be based on the
30 known ageing phenomenon of the conventional paper pictures which tend to change in colour when getting older. Typically the old photographs tend to get more yellowish and/or greyish and/or brownish than what they originally were. This known

effect can be utilised with the digital images as well. If the age of the digital image is substantially old, the image may be digitally modified such that it first appears e.g. as a greyish and yellowish image, transmuting then back to a normal colour image. Fresh images may also be indicated e.g. by green colour and so on.

Image data files typically comprise data associated with creation date and time of the image, e.g. by means of the so called time-stamp. The age of the image may be determined based on this data by the user equipment 2 and the visual effect may be set accordingly.

The third example utilises location information regarding the location of the user equipment 1 used for transmitting an image. The skilled person is aware of various possibilities for the provision of location information associated with the geographical location of a mobile user equipment, and thus they will not be explained here in detail. It is sufficient to note that substantially accurate geographical location information can be obtained, for example, based on the satellite based GPS (Global Positioning System). More accurate location information can be obtained through a differential GPS. A possibility is to use a location service (LCS) provided by a cellular system for the provision of the location information. In the latter the cells or similar geographically limited access entities and associated controllers of the communication system can be utilised to produce location information associated with a mobile station. The cellular communication system may also be provided with location measurement units that provide more accurate data concerning the location of the user equipment within the service area of the cellular system. The location data may be processed in a

specific location service (LCS) node implemented either within the cellular system or connected thereto. Alternatively, or in addition to the LCS node, the location data may be processed in the user equipment provided with appropriate processing capacity. All these techniques are known, and will thus not be discussed herein in more detail.

The user equipment 2 may also be made aware of its position. The distance and direction to the user equipment 1 transmitting image data is visualised in the display phase. There are several possibilities for this. For example, as illustrated by Figures 3A and 3B, an image taken far away from the location of the user 2 is zoomed in the display such that it starts as a small figure in the centre of the display (Figure 3A) and increases in size (zooms) to the normal size thereof (Figure 3B). The more far away the image comes from, the smaller the initial picture frame may be. Alternatively, it may take longer for a far-away image to zoom up to the normal size thereof.

According to a further possibility illustrated by Figures 4A to 4D the direction in which the sender is visualised to the user of the receiving terminal. For example, if the image is taken or transmitted geographically north from the user, the image starts zooming from the top of the display. If the image is taken or transmitted east from the user, the image starts zooming from the right of the display, and so on.

Additionally, the receiving mobile device 2 may be made aware of its position and direction (e.g. by means of a digital compass). If the location data concerning the transmitting device 1 is also provided to the receiving device 2, it is possible to control the display such that the image moves

relatively on the display 21 based on the relative direction between the transmitting device 1 and the receiving device 2. For example, if an image arrived from the north and the user is facing the east, the image could appear from the left of the display 21, instead of the top of the display.

The capability of receive visualised information regarding the relative positioning may be useful e.g. in the future professional cyber tools that may be used in professions such as guards, policemen and maintenance personnel, who collaborate in a team in a scene and exchange images of views they are facing. The users may even be provided with head-mounted displays and cameras, wearable computers and wireless connectivity.

15

According to a possibility a map of the area where the transmitting user equipment is located or what is illustrated by the image is shown by the display. Based on the location information the image received by the receiving user equipment "pops up" from a certain location in the map. For example, an image taken in London pops up or zooms out from the London area on a map showing England. In a city, the image may pop up from a specific street or building on a local map and so on. This is illustrated by Figure 5.

25

The visual effect is provided by displaying a distorted version of the image. For example, the image may be inclined, stretched, granular or come out from a screw or otherwise be purposively distorted from the final image.

30

According to a further example the user may associate some colouring schemes to different locations. For example, if the user equipment 2 receives images about the region of the

workplace of the user (sent e.g. by his colleagues), these images may appear first as red. If the images show the user's home region, the images may first appear e.g. as green. This colour information would indicate immediately additional
 5 information about the geographical source of the image. If the user knows that the image is taken in a certain environment (e.g. home/work), this may accelerate and ease the perception and identification of the image.

10 Images received from persons belonging to different caller groups may be visualised in a similar manner as well. For example, images sent by family members will first appear as green, images sent by work-mates appear as red, images sent by friends appear as blue and so on. It shall be appreciated that
 15 other visualisation effects, such as movements of the images and so on, may also be used to identify the caller groups.

In accordance with a further embodiment emotional feelings of the sender are transmitted to the receiver of the image by
 20 means of the visualised additional information. For example, vacation photographs of subjects such as scenery, people, statues may have strong emotional impact on the person taking the picture. However, these photographs may not create the same emotional feeling in the recipient as what the sender
 25 felt. It may be important for the sender to be able to mediate his emotional state (e.g. excitement) since it may have been the reason for taking the picture in the first place. The emotional or affective information may be attached with the image and visualised in the display phase by using different
 30 colours (as described above) or other visual effects. The other effect may be such as shaking of the image, zooming of the image, despeckling of the image, building up the image out of blocks and so on.

The user equipment 1 of the sender may be provided with appropriate physiological sensors for sensing emotional information about the sender so that the information may be derived automatically. The emotional state may be found out using emotion recognition methods, such as recognition of mood from voice or gestures or other physiological signals. The emotional status may also be given manually by the sender by means of appropriate input means provided in the sending user equipment.

According to a further embodiment information regarding auditory events is shown visually to the viewer of the image. A short auditory scene sample associated with the target of the image may be recorded and transmitted along with the image. In order for the recipient user to get the knowledge of this auditory information during the display phase, the user must typically listen to the recordings while watching the image. However, in many instances, such as in a bus or train, the user may not wish to do so as it might be disrupting and/or a non-deliberate eavesdropping may occur. The auditory information about the image's context may be visualised in the beginning of watching the image by appropriate visual effects. These effect may comprise the effect explained above, that is a colour change, zooming and so on. For example, if loud noises were present at the scene, a red initial colour and/or shaky movement may be used to visualise this. If the target scene was silent, a grey and still image may be displayed to the recipient user.

A further embodiment relates to a possibility of visualising movements of an object in a stationary still image. Thus the still images explain little about the movements in the

picture, although a motion blur in the image might tell something. Even if the viewer realises that some movement is involved, it may be difficult for the viewer to conclude whether it is the user or the objects in the scene which are moving. Video would naturally reveal this but the recipient user equipment may support only still-images, or more expensive video transmission is not desired for the transmission of the image data.

10 The movement of the sender may be analysed using a set of accelerometer sensors provided in the imaging device. The movement in the scene may be analysed by appropriate image analysis methods. The movement information is attached with the image data sent to the recipient. After reception, the data is visualised to the recipient user 2. For example, the image may move from the left of the display to the middle, or shake for a short period of time prior to displaying the proper image. This would indicate that the sending user 1 was moving while he/she was taking the image. Although a camera-shoot is usually stationary, the camera may be e.g. head-mounted and the user may be in move. An example of such a user is a worker operating with wearable computers.

25 The change between different version of an image may occur at once. The change may occur by smoothly "sliding" from the first version of the image towards the real image. The sliding may occur by means of small steps between e.g. differently coloured version of an image.

30 Due to the characteristics of the human eye, the absolute degree of coloration may not always be an especially effective way of describing any accurate information, such as an accurate value of temperature. However, the human beings

recognise easily difference between colours and/or changes in colours. The different colours are thus believed to be a good visual effect when describing approximate or relative values, which is often sufficient. For more accurate information it is possible to add e.g. textual notification in addition to the visual effect.

User equipment such as mobile stations with image processing capability and data communication systems that enable mobile users to transport substantially large data files to each other are beginning to be available for the public. The users of such devices may find that the display of visual effects on images is of great benefit for them. For example, mobile subscribers may wish to sent images to each others just for fun. The visual effects may add the entertainment value of the images, even in instances where the effects may have no informative value. The additional information may also be used for personalization of the images.

Examples of the possibilities for the data communication network 5 of Figure 1 include, without limiting to these, standards and/or specifications such such as GSM (Global System for Mobile communications) or various GSM based systems (such as GPRS: General Packet Radio Service), AMPS (American Mobile Phone System), DAMPS (Digital AMPS), WCDMA (Wideband Code Division Multiple Access), IS-95 or 3rd generation UMTS (Universal Mobile Telecommunications System), IMT 2000 (International Mobile Telecommunications 2000) and so on.

It should be appreciated that whilst embodiments of the present invention have been described in relation to mobile user equipment such as mobile stations 1 and 2 of Figure 1, embodiments of the present invention are applicable to any

other suitable type of user equipment. Therefore it shall be appreciated that in addition to mobile visual communication devices, the invention may be employed e.g. in any image archive and/or browsing software run e.g. in an ordinary
5 desktop computer. The image data may be sent in any suitable format.

The user equipment may be switched between modes in which the visual effects are displayed and in which the effects are not
10 displayed. Those user equipment which are not capable of displaying the visual effect may simply ignore the additional information and display the image in a conventional manner. It is also possible to associate an indication to the image data which either allows or prevents display of any visual effects.
15 The indication may be e.g. a permission flag.

It is also noted herein that while the above describes exemplifying embodiments of the invention, there are several variations and modifications which may be made to the
20 disclosed solution without departing from the scope of the present invention as defined in the appended claims.

Claims

1. A method for displaying an image comprising:
receiving image data associated with the image at a user
5 equipment from a data communication system;
generating a visual effect to be presented in association
with a version of the image, said visual effect being
generated based on additional information associated with the
image;
10 displaying said visual effect by display means of the
user equipment; and
displaying the image by the display means.
2. A method as claimed in claim 1, wherein said version of
15 the image associated with the visual effect is presented
before displaying the image.
3. A method as claimed in claim 1 or 2, wherein the
presentation of said visual effect is started before all image
20 data that associates with the image has been received in its
entirety from the data communication system.
4. A method as claimed in any preceding claim, wherein the
visual effect is presented on the display means for a
25 predefined period of time.
5. A method as claimed in any of the preceding claims,
wherein the visual effect visualises information that is
associated with the context or content of the image.
30
6. A method as claimed in claim 5, wherein the visual effect
visualises at least one of the following features: the
temperature in the target of the image; the time when the

image was created; movements associated with the image;
emotional feelings associated with the image.

7. A method as claimed in any preceding claim, wherein the
5 visual effect visualises the age of the image.

8. A method as claimed in any preceding claim, wherein the
visual effect visualises a location.

10 9. A method as claimed in claim 8, wherein the location is
the location of the source of the image data.

10. A method as claimed in claim 9, wherein the source
comprises the location of the target of the image or the
15 location of the imaging apparatus capturing the image.

11. A method as claimed in any of claims 8 to 10, wherein the
visual effect visualises relative location between the source
of the image and the user equipment.

20

12. A method as claimed in claim 11, comprising steps of:
providing first position data associated with the
geographical location of the user equipment;

providing second position data associated with the
25 geographical location of the source of the image data; and
processing of said first and second location data for
obtaining said relative location.

13. A method as claimed in any of claim 8 to 12, comprises
30 use of information associated with the directional position of
the user equipment.

14. A method as claimed in claim 12 or 13, wherein the processing is accomplished by a processor of the user equipment.

5 15. A method as claimed in any of claims 8 to 14, wherein the location is visualised by displaying a version of the image on a position on the display means that depends on the location.

16. A method as claimed in claim 15, comprising further step
10 of displaying a map, wherein a location on said map is visualised by associating said version of the image with a position on the map.

17. A method as claimed in claim 15, wherein locations in the
15 north are indicated by associating the display of the version of the image with the top portion of the display means, locations in the south are indicated by associating the display of the version of the image with the lower portion of the display means, locations in the west are indicated by
20 associating the display of the version of the image with the left portion of the display means, and locations in the east are indicated by associating the display of the version of the image with the right portion of the display means.

25 18. A method as claimed in any of claims 8 to 17, wherein the size of the image visualises the distance between the location and the user equipment.

19. A method as claimed in any of claims 8 to 18, wherein the
30 speed in which the size of the image changes is used to visualise the distance between the location and the user equipment.

20. A method as claimed in any preceding claim, wherein the visual effect comprises moving a version of the image on the display means.

5 21. A method as claimed in any preceding claim, wherein the visual effect is indicative of the importance of the image.

22. A method as claimed in any preceding claim, wherein the visual effect is indicative of a priority order of the image.

10

23. A method as claimed in any preceding claim, wherein the visual effect visualises an audio effect associated with the image.

15 24. A method as claimed in any preceding claim, wherein the visual effect is indicative of the origin of the image.

25. A method as claimed in claim 24, wherein the visual effect indicates a group of persons.

20

26. A method as claimed in any preceding claim, comprising a step of sensing additional information that associates with the image during generation of the image data.

25 27. A method as claimed in any preceding claim, comprising a step of associating additional information with the image data prior transmission of the image data.

30 28. A method as claimed in any preceding claim, wherein a processor means of the user equipment process said received data and creates a modified version of the image based on the received image data and the additional information.

29. A method as claimed in any preceding claim, wherein the presentation of the visual effect comprises presentation of a differently coloured version of the image.

5 30. A method as claimed in claim 29, wherein a predefined colour during the presentation of the visual effect visualises a predefined condition.

10 31. A method as claimed in claim 29 or 30, wherein at least one colour of the image is modified by altering the colour index table of the image.

15 32. A method as claimed in claim 29 or 30, wherein at least one colour of the image is modified by modifying the bitmap of the image.

20 33. A method as claimed in any preceding claim, wherein the additional information is obtained from the name of an image data file.

34. A method as claimed in any preceding claim, wherein the additional information is included in the image data.

25 35. A method as claimed in any preceding claim, wherein the additional information is included in a separate field of an image data file.

30 36. A method as claimed in any preceding claim, wherein the presentation of the visual effect comprises provision of a shaking or vibrating version of the image.

37. A method as claimed in any preceding claim, wherein the presentation of the visual effect comprises provision of a distorted version of the image.

5 38. A method as claimed in any preceding claim, wherein the presentation of the visual effect comprises provision of at least one differently sized version of the image.

39. A method as claimed in any preceding claim, wherein the
10 image data is transmitted over a wireless interface between the user equipment and the data network.

40. A method as claimed in claim 39, wherein the user
equipment comprises a mobile station adapted for communication
15 with a cellular communication network.

41. A method in a mobile station for displaying an image on a display means thereof, comprising:

receiving image data associated with the image and
20 additional information from a data communication system, said image data and additional information being transmitted over a wireless interface between the mobile station and the data communication system;

generating a visual effect to be presented in association
25 with a version of the image, said visual effect being generated based on said additional information;

displaying said visual effect by the display means; and
displaying the image by the display means.

30 42. A user equipment for displaying an image comprising:
receiver means for receiving image data associated with the image from a data communication system;

display means for displaying the image based on the received image data; and

processor means for generating a visual effect based on additional information associated with the image and for
5 controlling display of the visual effect, wherein the user equipment is arranged to display a version of the image comprising said visual effect.

43. A user equipment as claimed in claim 42 being adapted to
10 display the version of the image that comprises the visual effect before displaying the image.

44. A user equipment as claimed in claim 43, wherein said visual effect is displayed before all image data has been
15 received in its entirety from the data communication system.

45. A communication system, comprising:

a data communication media for transporting data between at least two user equipment;

20 a first user equipment for generating image data associated with an image, said first user equipment being adapted to associate additional information with the image data;

a second user equipment comprising a receiver means for
25 receiving the image data, a processor means for processing said received image data, and a display means for displaying the image based on the received image data, said second user equipment being also adapted to display an altered version of the image, wherein the altered version comprises a visual
30 effect generated based on said additional information associated with the image.

Abstract

Displaying an image

5 An image can be displayed based on image data by means of a
user equipment. In the disclosed method image data associated
with the image is received at a user equipment from a data
communication system. A visual effect is generated based on
10 additional information associated with the image. The visual
effect is subsequently presented in association with a version
of the image by displaying said visual effect by display means
of the user equipment. The image is also by the display means,
either after or before the display of the visual effect.

15 (Figs. 2A and 2B)

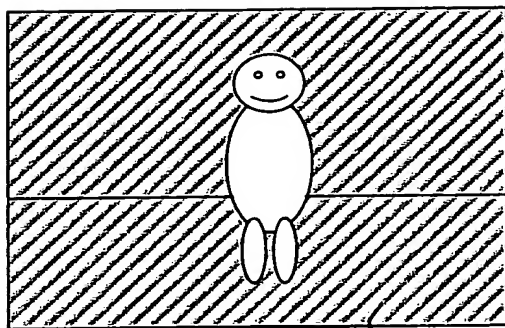
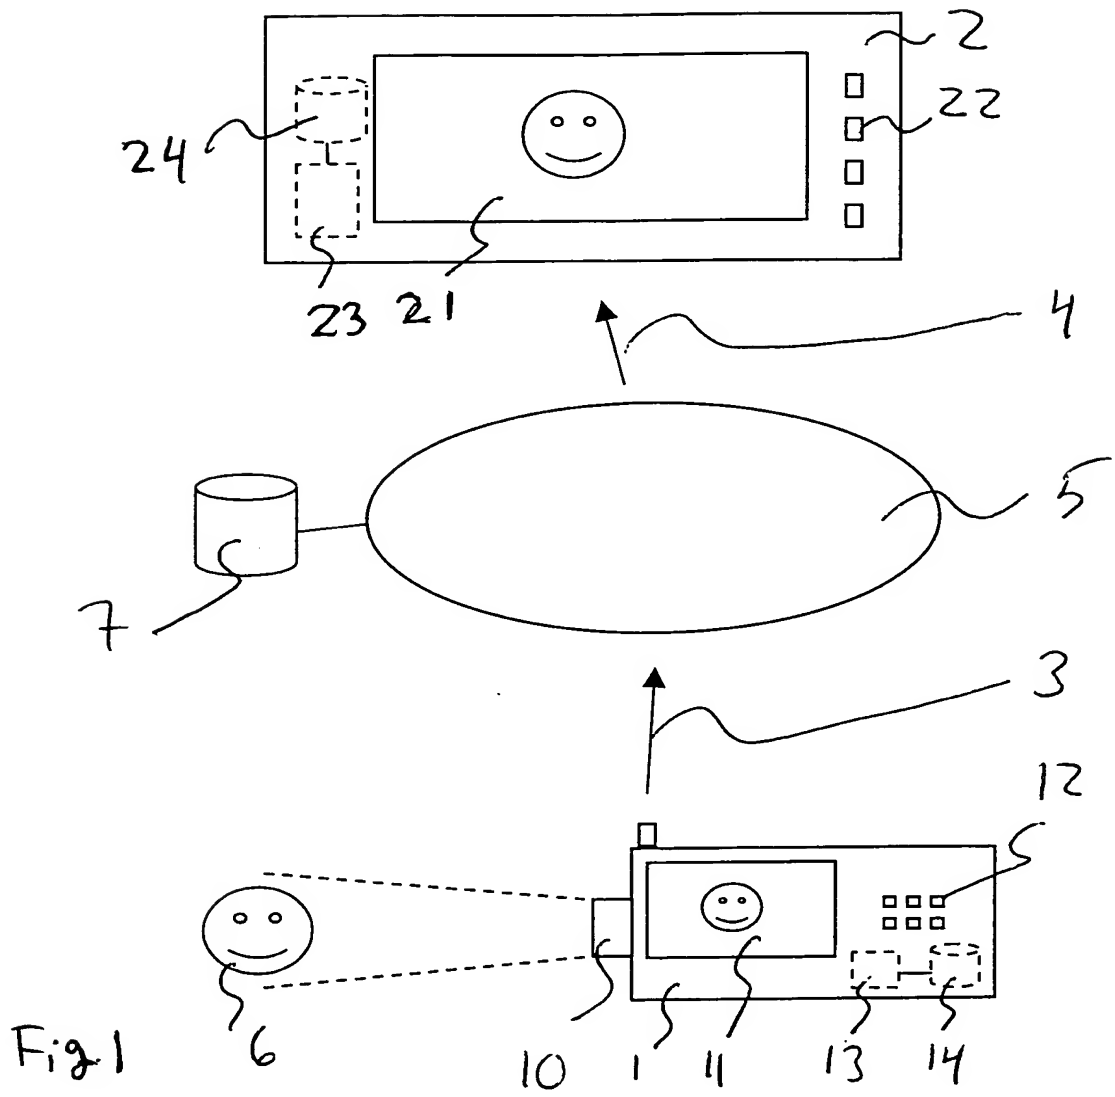


Fig 2A

21

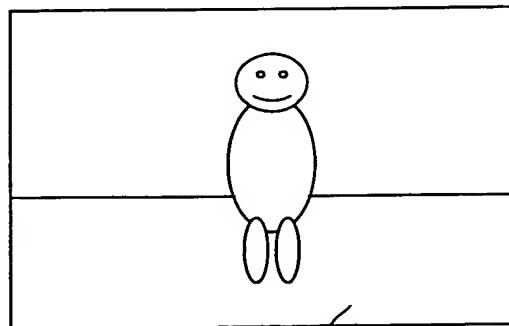


Fig 2B

21

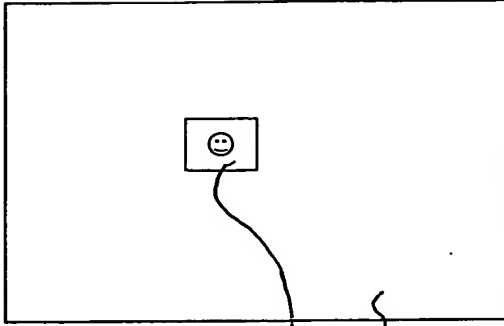


Fig 3A 30 21



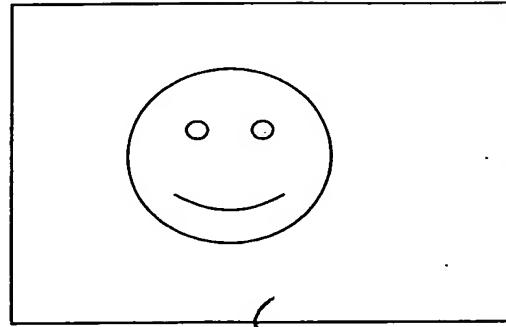


Fig 3B 22

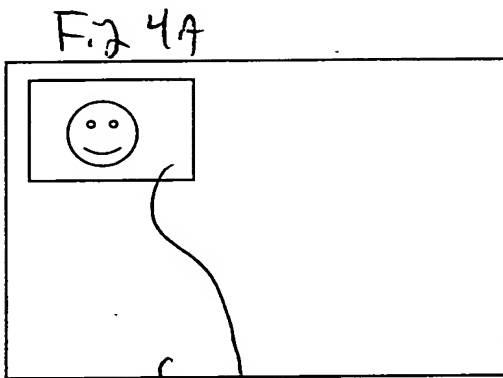

21 30

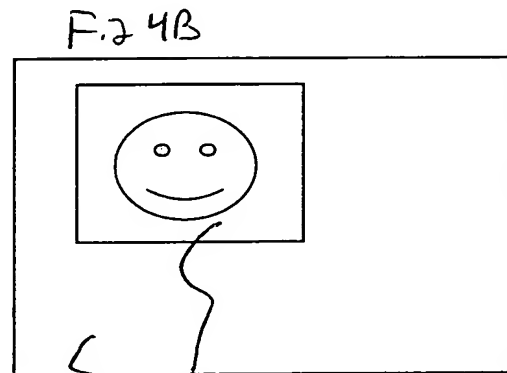

21 30

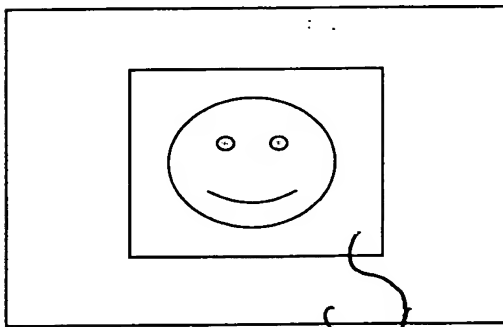


Fig 4C 21 30

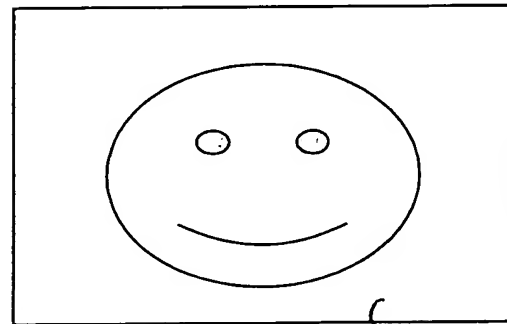
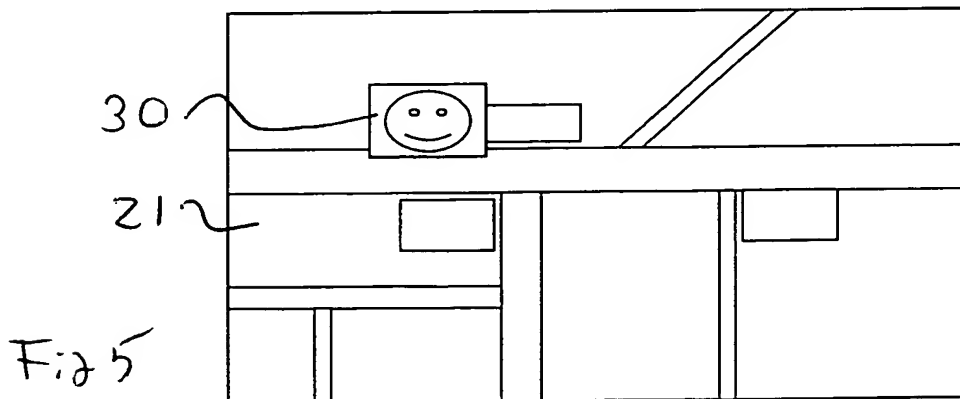


Fig 4D 21



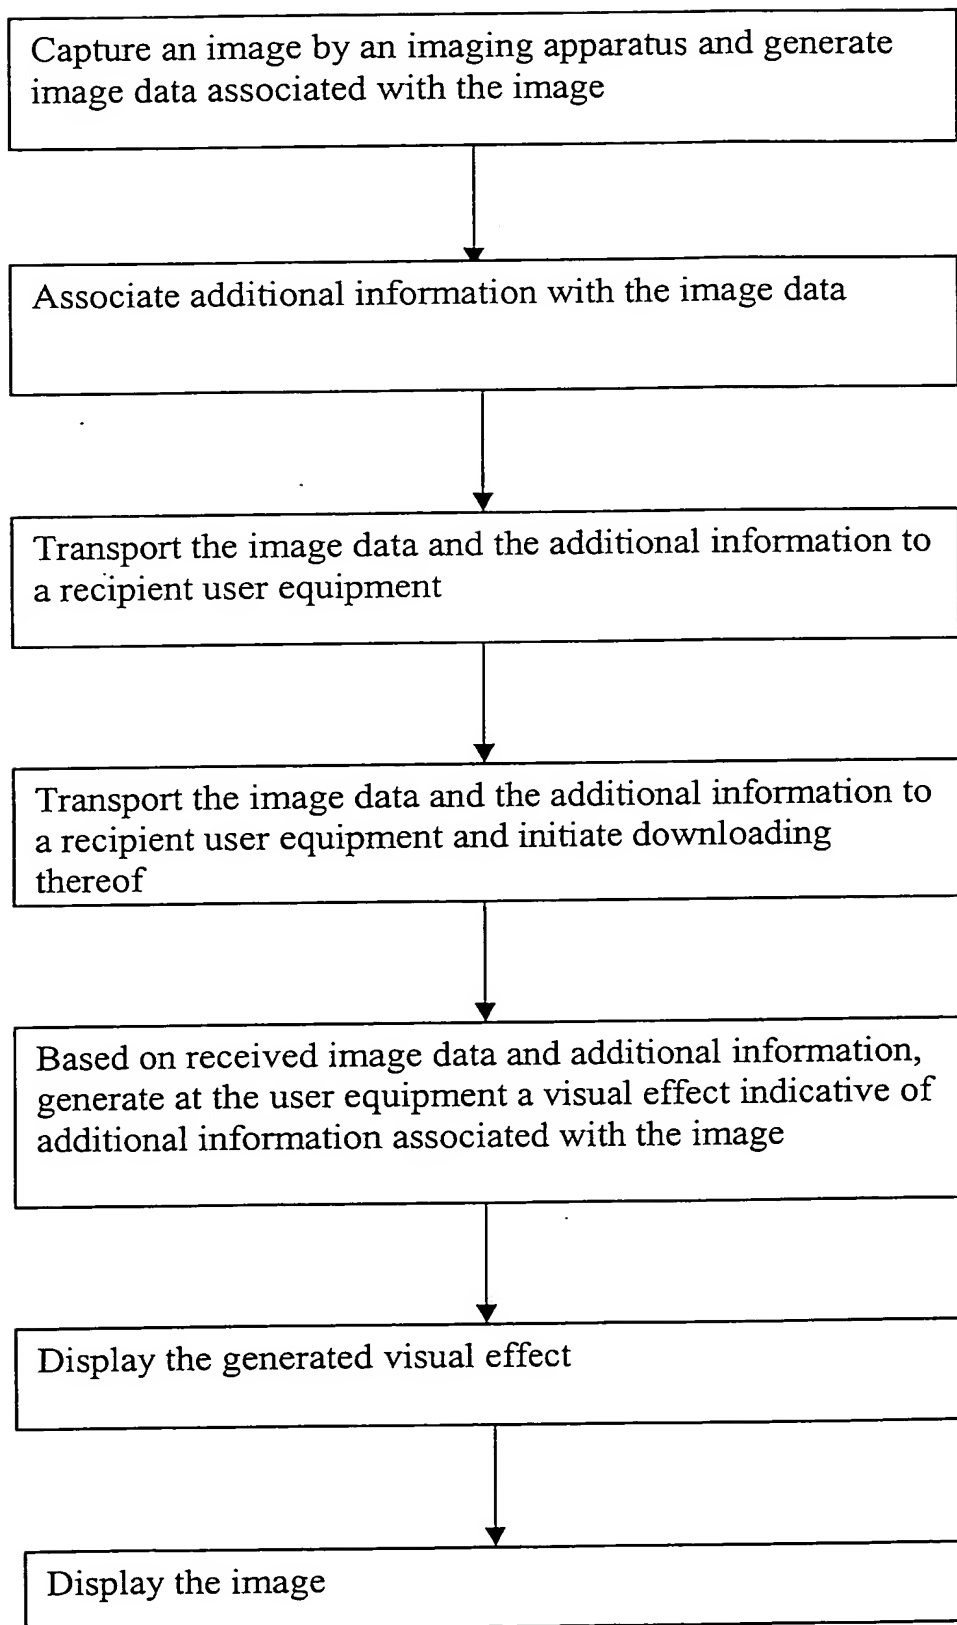


Fig. 6